


9261009

## miBUS Gen2 Door Guard Remote

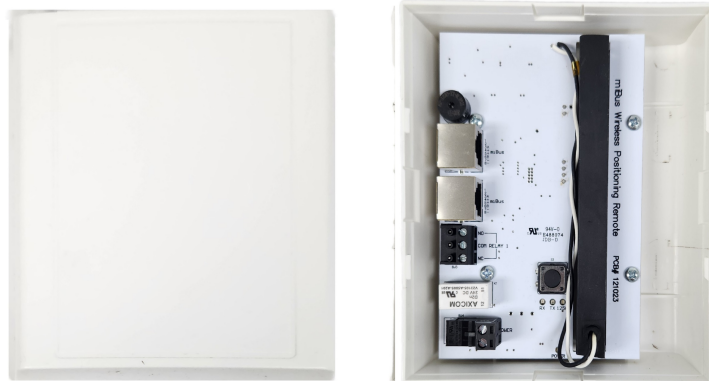

### Description

The miBUS Gen2 Door Guard Remote allows for easy, low cost deployment of wander management throughout any scale of facility.

Each Door Guard Remote can detect the presence of a miPOSITION Wander Tag within up to 15'. This presence detection is then transmitted back to the miALERT Event Management Software server over the miBUS wired protocol. The server uses this presence detection to raise alarms, monitor activity, and activate other connected devices within the miALERT Nurse Call System, such as locking doors and activating klaxons or dome lights.

Up to 4 door guard remotes can be managed by a single miBUS controller.

### Features

- Provides wander management with a detection radius of up to 15'.
- Mounts to a 1-gang box or directly to drywall.
- 4 units can be daisy-chained to a single controller.

### Specifications

**Unit:** 140mm x 122mm x 58mm

**Power:** 24VDC, 500mA maximum draw.

**Certified Cable:** UltraGIG / UG-C6FT6-colour E539766 / UG-C6FT4-colour E539766

#### INTERTEK RECOGNIZED COMPONENT

Hospital Signaling and Nurse Call Equipment [UL 1069:2007 Ed.7+R:12Aug2016]; Standard(s) Signal Equipment [CSA C22.2#205:2012 Ed.2 +E2015]

### Package Contents

- miBUS Gen2 Door Guard Remote
- Backplate
- Two (2) 6/32x1 Gang Box Screws